



Cut out to convert MY16 Throttle Cutout to Accept MY17 Throttle

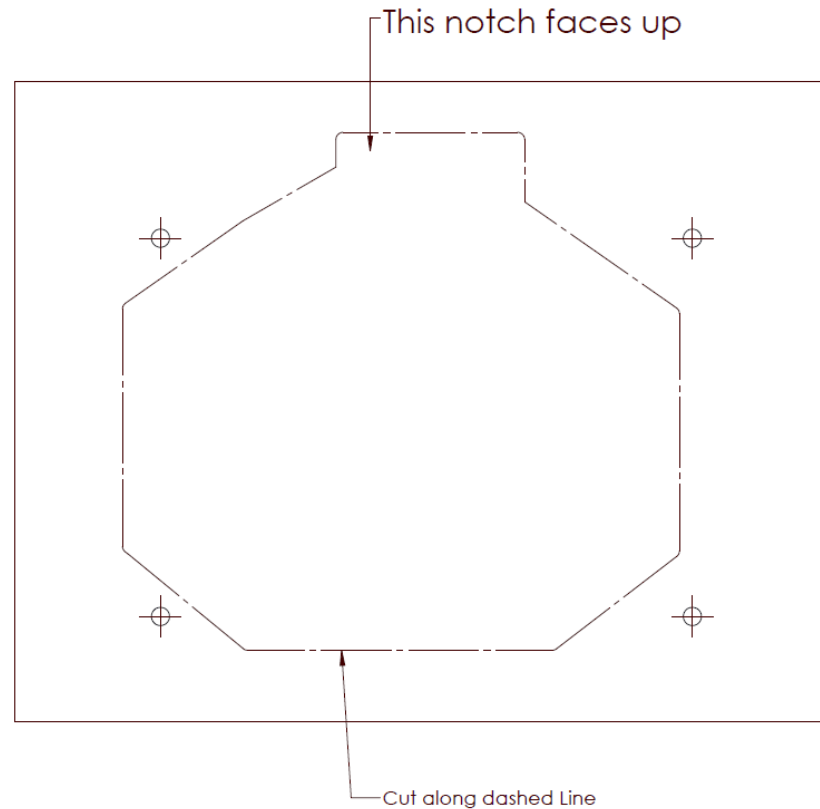

- Print template on a 1:1 scale (do not fit to page)
- Cut out the dashed line portion of the template (this provides the outline for the cutout)
- Use the 4 holes to locate the template correctly
- Mark any fiberglass exposed inside the cut
- Remove the exposed fiberglass by cutting on the marked line

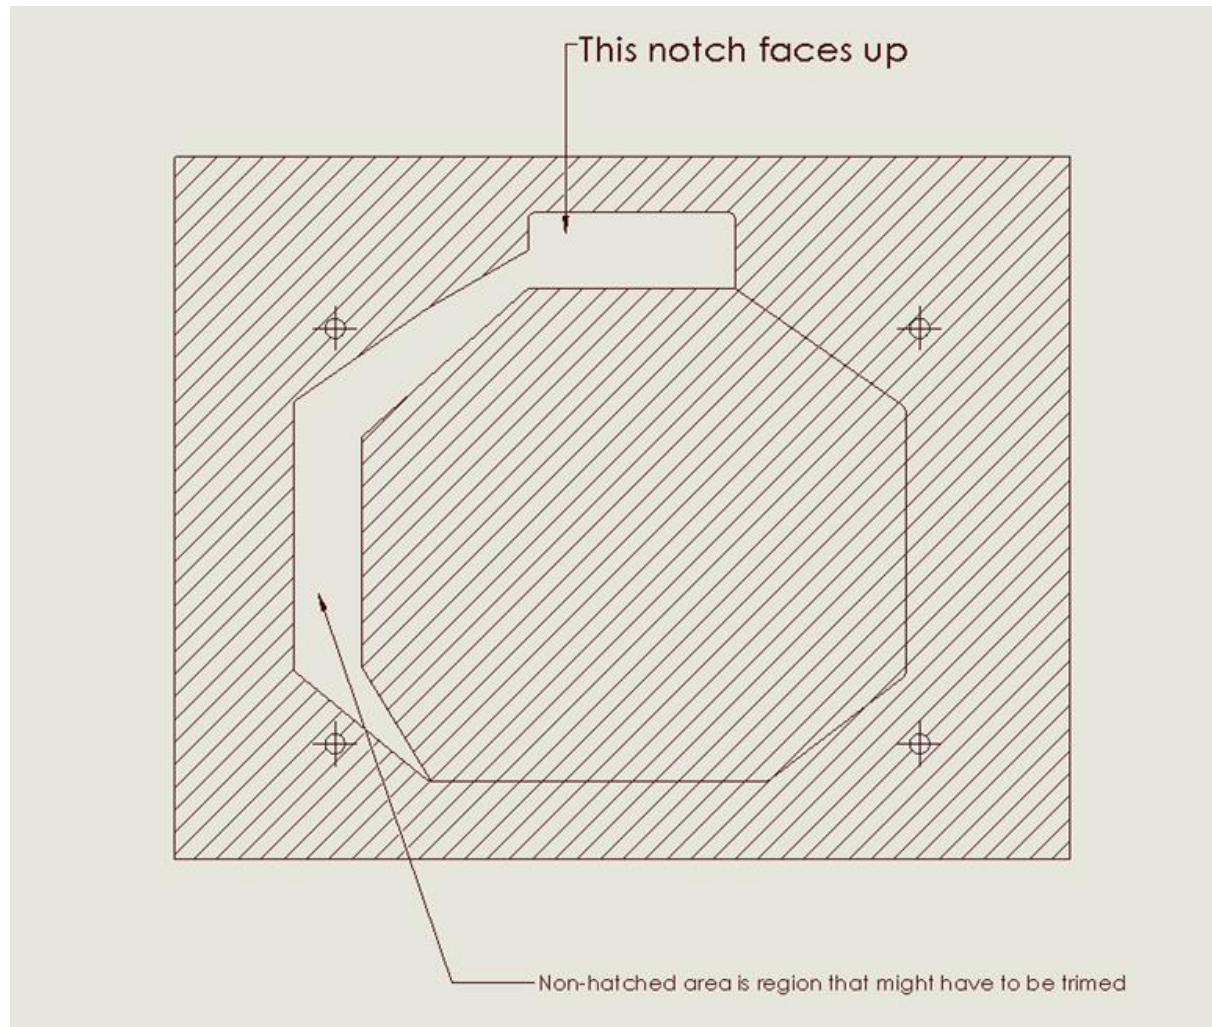

The non-cross hatched area is the general area that might be removed from the current cut out.